
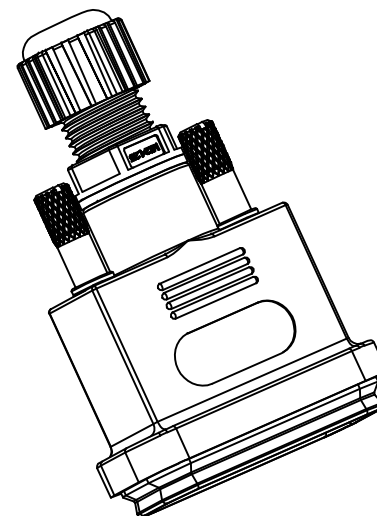







編號	品 名	材質
1	迫緊螺帽	PA66無纖
2	軟膠3	TSE-221-5u
3	卡槽螺絲L	Cu
4	線束螺母	PA66無纖
5	軟膠2	TSE-221-5u
6	軟膠4	TSE-221-5u
7	防水外殼	ABS757
8	軟膠1	TSE-221-5u

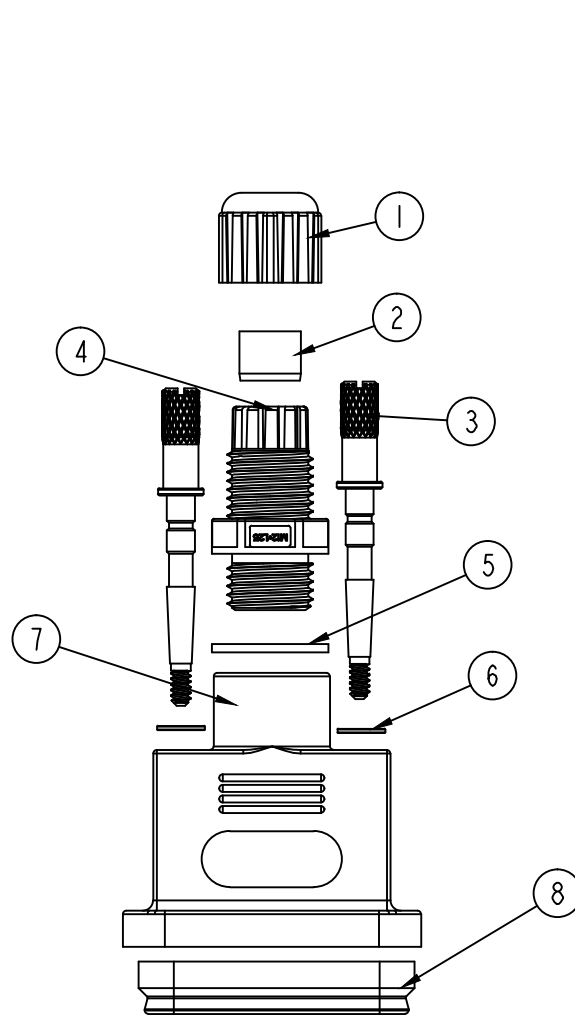

規格	OD
單位:mm	
9PIN	6.80
15PIN	7.90
25PIN	8.80
37PIN	9.90
50PIN	11.60

修正	日期	說明	核准	材質	熱處理	日期	圖名	成品別:	模貝別:
				收縮比	比例	模穴數	數量	備註	
▲	2019.04.16	卡槽螺絲材質變更		繪圖	設計	核對	核准	圖號	張號
▲	2018.08.01	增加材料型號							

D-SUB防水護套

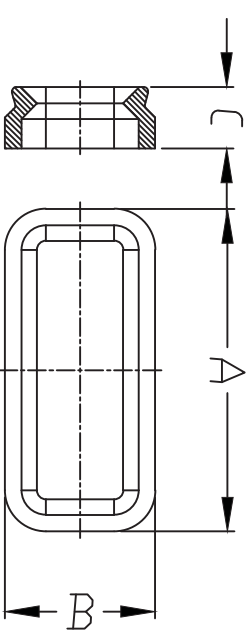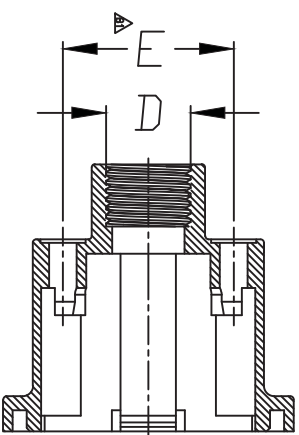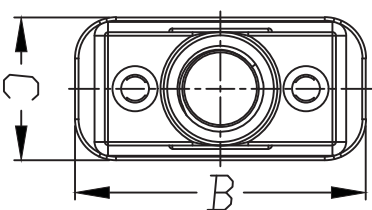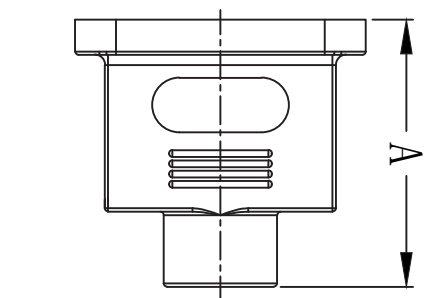

零件名稱：防水外殼

規格	A	B	C	D	E
單位:mm					
9PIN	39.10	42.75	21.00	M12X1.25	25.00
15PIN	39.10	51.00	20.90	M13X1.25	33.30
25PIN	39.10	64.80	20.90	M14X1.25	47.00
37PIN	39.10	81.05	20.90	M15X1.25	63.50
50PIN	39.10	78.85	23.90	M18X1.25	61.20



零件名稱：軟膠 1 註

規格	A	B	C
單位:mm			
9PIN	39.35	18.30	7.50
15PIN	47.67	18.30	7.50
25PIN	61.39	18.30	7.50
37PIN	78.20	18.30	7.50
50PIN	75.65	21.30	7.50

註：部分規格有內縮變形問題，請實配檢驗

△ TWO PLACE DECIMAL ±0.3
△ THREE PLACE DECIMAL ±0.2

D-SUB防水護套

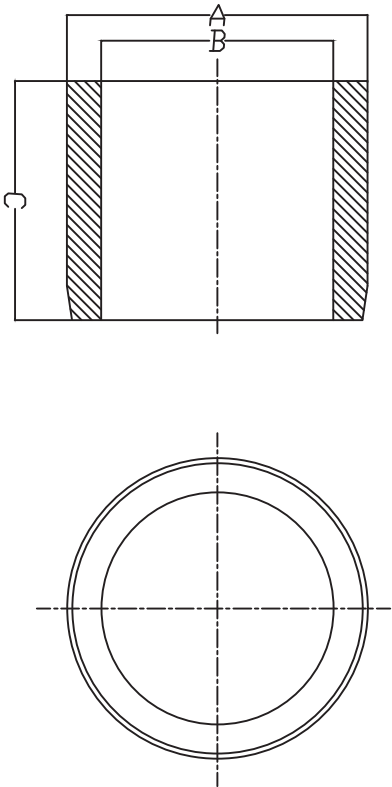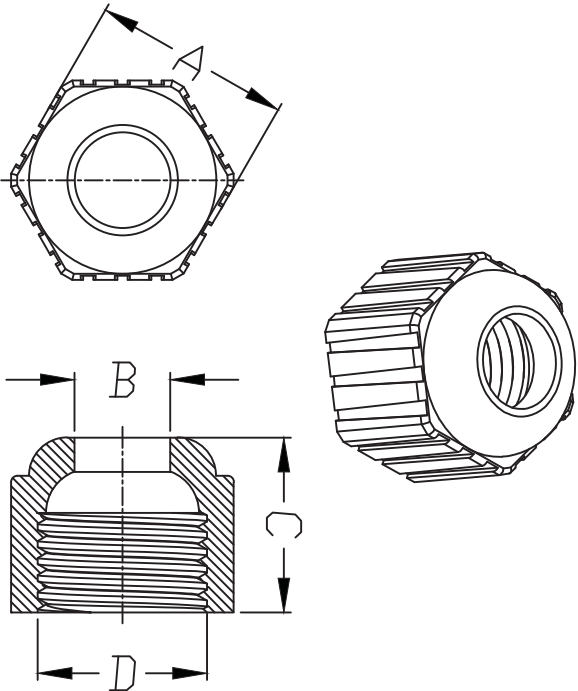

零件名稱: 迫緊螺帽



規格	A	B	C	D
單位:mm		Δ	Δ	
9PIN	14.60	6.80	12.70	M12X1.25
15PIN	15.40 Δ	7.90	13.10 Δ	M13X1.25
25PIN	16.30 Δ	8.80 Δ	12.70	M14X1.25
37PIN	17.30	9.90	12.70	M15X1.25
50PIN	21.80	11.60	12.70	M18X1.25

零件名稱: 軟膠 3

規格	A	B	C
單位:mm			
9PIN	8.80	6.80	7.00
15PIN	9.80	7.80	7.00
25PIN	10.80	8.80	7.00
37PIN	11.80	9.80	7.00
50PIN	13.40 Δ	11.50 Δ	7.00

Δ TWO PLACE DECIMAL ± 0.3
 Δ THREE PLACE DECIMAL ± 0.2

D-SUB防水護套

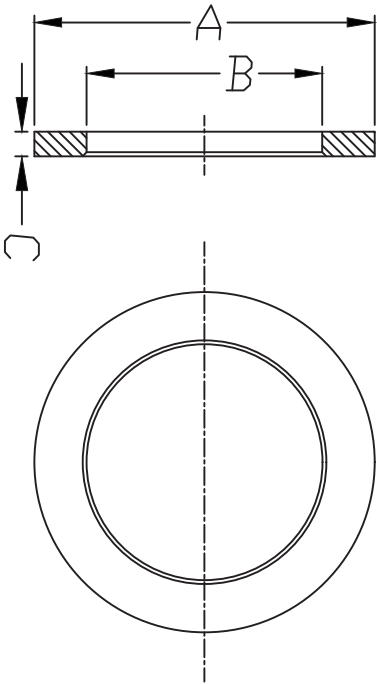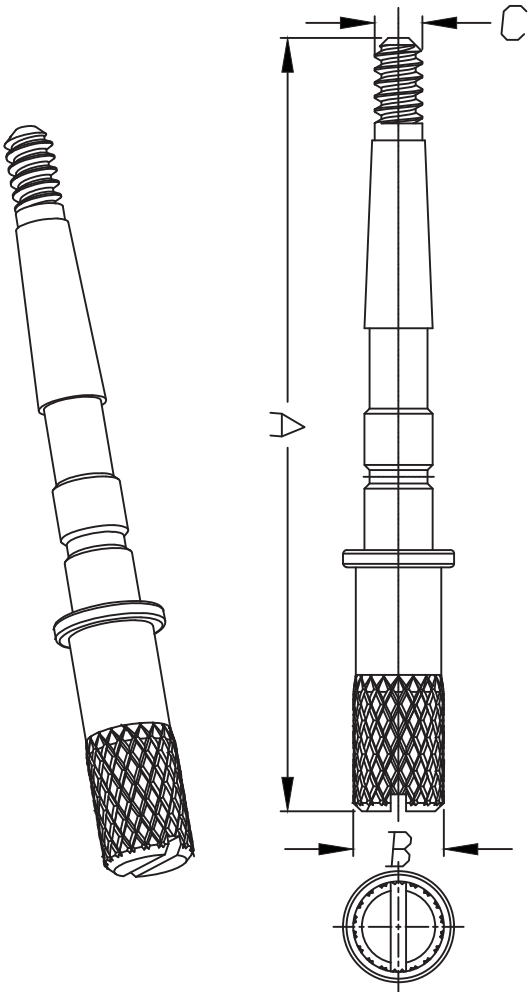


零件名稱: 卡槽螺絲			
規格	A	B	C
單位:mm			
共用件	46.3	φ5.2	4#4.0

△ TWO PLACE DECIMAL ±0.3
△ THREE PLACE DECIMAL ±0.2




零件名稱: 軟膠 2				
規格	A	B	C	
單位:mm				
9PIN	φ16.0 △	φ11.5	1.15	
15PIN	φ16.6	φ12.5	1.50 △	
25PIN	φ17.6	φ13.5	1.50	
37PIN	φ18.6	φ14.5	1.30	
50PIN	φ21.6	φ17.3	1.30	

D-SUB防水護套

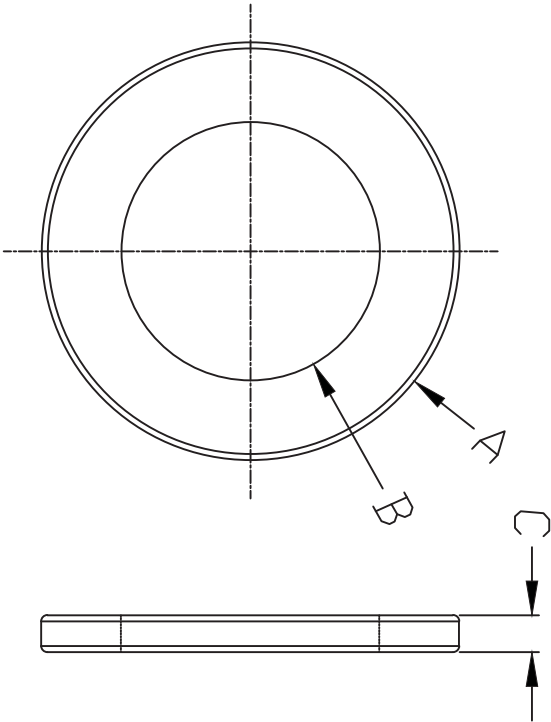

零件名稱: 軟膠 4			
規格	A	B	C
單位:mm			
共用件	φ6.50	φ4.00	0.8

▲ TWO PLACE DECIMAL ±0.3
▲ THREE PLACE DECIMAL ±0.2

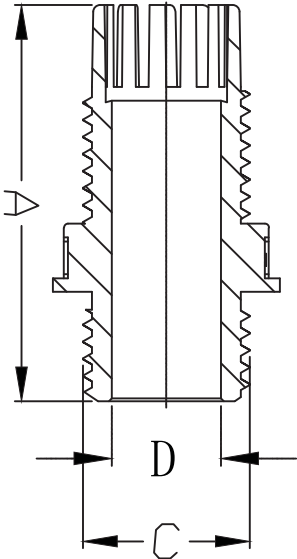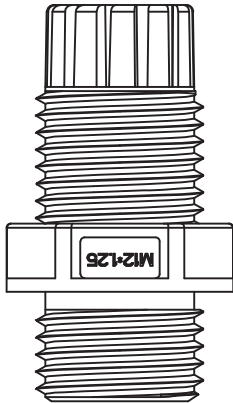

零件名稱: 線束螺母

規格	A	B	C	D
單位:mm				
9PIN	28.75	14.6	M12x1.25	8.00
15PIN	28.90 ▲	14.6	M13x1.25	9.00
25PIN	28.75	15.6	M14x1.25	10.00
37PIN	28.75 ▲	16.3	M15x1.25	11.00
50PIN	28.75	19.2	M18x1.25	12.85